MONUMENTS IN UNPAVED AREAS ARE NOT REQUIRED TO BE SET PER THIS DETAIL.



PLAN VIEW

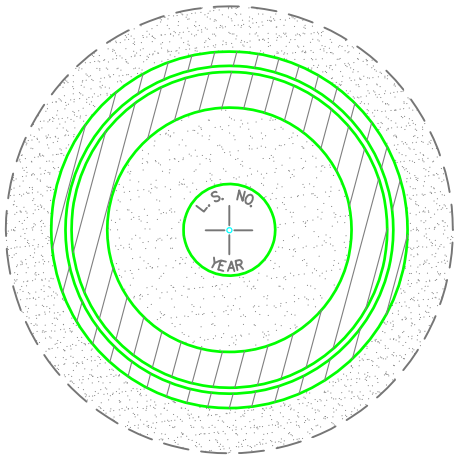

PLAN VIEW



CROSS SECTION VIEW

MONUMENT COVER

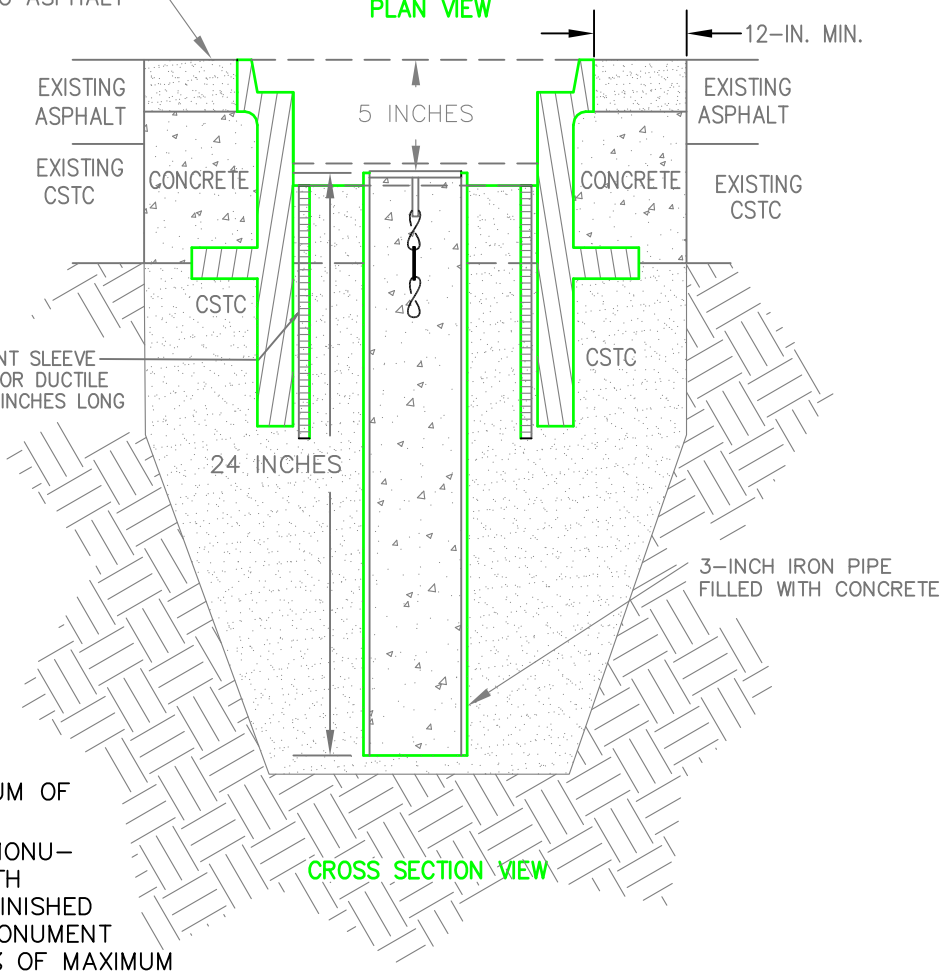

CROSS SECTION VIEW

NOTES:

1. BRASS CAP SHALL BE A MINIMUM OF 2 INCHES IN DIAMETER.
2. AREA EXCAVATED TO INSTALL MONUMENT SHALL BE BACKFILLED WITH CSTC TO WITHIN 9 INCHES OF FINISHED GRADE (THE BOTTOM OF THE MONUMENT CASE) AND COMPACTED TO 95% OF MAXIMUM DENSITY. THE VOID INSIDE THE MONUMENT CASE SHALL ALSO BE FILLED WITH CSTC TO THE BOTTOM OF THE BRASS CAP.
3. ADJUST MONUMENT IN ASPHALT TO 1/4 INCH BELOW FINISH GRADE.
4. "MON" SHALL BE CAST INTO THE LID.
5. ALL CONSTRUCTION AND MATERIALS SHALL MEET THE SPECIFICATIONS AND BE APPROVED BY THE CITY OF EPHRATA.
6. ELEVATION TO BE STAMPED ON BRASS CAP
7. MONUMENT CASES SHALL COMPLY WITH EPHRATA COMMUNITY STREET AND UTILITY STANDARDS SECTON 9-22.1 .

DATE	REVISION	BY

MONUMENT - TYPE I

EPHRATA PUBLIC WORKS DEPARTMENT

CITY OF EPHRATA

GRANT COUNTY WASHINGTON

DRAWN
CHECK
SCALE NTS
DATE 10/03/08

A-12